

Technical Specification Sheet

# Rotaking

The new OKTOPUS® Rota-King vacuum lifter features 180° tilt, delivering ultimate control for roofing panel installation projects.

Highly compatible to install composite roof panels such as Kingspan KS1000, Topdek, Roma and Corus brands, the Rota-King vacuum lifter offers 180° face-to-face delivery for easily moving panels into mounting position and unpacking interleaf panels.

Capable of handling roof panels up to 18m, with a 400kg capacity the Rota-King comes with dual circuit vacuum technology, low-vacuum alert for extra safety and 8-10 hour battery life.


As the official dealer of the Wirth OKTOPUS® vacuum lifter range, we ensure the Rota-King is serviced and maintained to the highest standards for our customers. Our technical engineers are also available to provide the support you require and answer any technical queries.

## Technical Specifications

<b>Typical application</b>	Suitable for rotation and installation of roofing panels up to 18m
<b>The building panels to be processed</b>	<ul style="list-style-type: none"> <li>- Composite panels (PUR, EPS, mineral wool)</li> <li>- All customary sandwich panels &amp; trapezoid sheet metals</li> <li>- Must be a non-porous and clean lifting surface</li> <li>- May not be covered by protective film</li> </ul>
<b>Safe working load</b>	Up to 400kg depending on type and number of pads
<b>Tilt</b>	180° (face-to-face delivery)
<b>Maximum panel lengths</b>	Up to 18 metres
<b>Weight of device</b>	620kg depending on configuration
<b>Control options</b>	Local, cable remote or optional radio remote
<b>Power supply</b>	24v rechargeable battery
<b>Battery recharge time</b>	10hours
<b>Battery life</b>	10 hours
<b>Vacuum production</b>	2 diaphragm type vacuum pumps
<b>Vacuum pads</b>	<ul style="list-style-type: none"> <li>- Round pads (Ø 250mm)</li> <li>- Oval pads (100mm x 320mm)</li> <li>- Rectangle pads (230mm x 690mm)</li> </ul>
<b>Optional accessories</b>	<ul style="list-style-type: none"> <li>- Safety belts</li> <li>- Transport stand</li> </ul>



## Dimensions (all measurements are in mm)

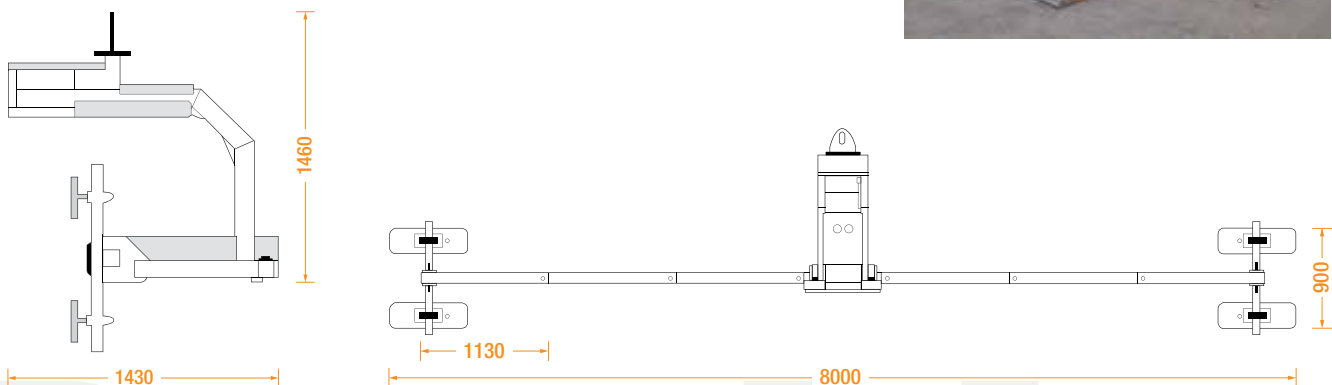

**HIRE OR PURCHASE TODAY - CALL OUR SPECIALIST TEAM ON:**

North: +44 (0)161 683 2580 - South: +44 (0)1844 202 071 - Scotland: +44 (0)1698 824444

[www.ggrcladding.com](http://www.ggrcladding.com)